



Speed. Control. Convenience. Solder Wire Feeder System

Solder Wire Feeder System Includes:

- USF-1000 Solder Wire Feeder Unit
- MX-H7-SF - Handpiece for solder feeder
- USF-FTA-12 - Feeder tube assembly 0.25-0.74mm wire diameter
- USF-GTA-12 - Guide tube assembly for USF-FTA-12
- WS1 - Sleeper Workstand
- Foot Switch
- AC-DC Power Adapter

Solder Wire Feeder System MX-UK7

Speed up your soldering process & increase your line efficiency.

Metcal's Solder Wire Feeder System adds control and convenience to your soldering process. The digital controls, high performance, and its ability to handle multiple solder wire diameters provide repeatability and functionality to your process. The Solder Wire Feeder pairs with Metcal's SmartHeat® MX-5200 or MX-500 Soldering and Rework Systems.



Solder Wire Feeder System

MX-UK7




Features and Benefits

- **Digital Controls with multiple Modes of Operation:** Forward Feed, Retraction, Delay, and Speed are programmable parameters in either the automatic, forward, or the backward mode of operation.
- **Large LCD Display:** Displays program parameters and a cycle counter with the selectable unit of measure, millimeters or inches.
- **Internal Program Storage:** Stores thirty (30) programs internally, allowing the operator to select the right program for the right application
- **Password Protection:** Prevents unintended changes to stored programs
- **Multiple Solder Diameters:** Compatible with solder diameters 0.3mm to 1.27mm
- **Solder Feed Blades:** Reduces the tendency for solder balls to form at point of use
- **Solder Spool Lock:** Secures the solder spool to the unit
- **Universal Power Supply:** Automatically senses the input line voltage and adjusts accordingly, which allows for worldwide operation without adaptors or a

Accessories & Spares

MX-H7-SF	Solder Wire Feeder Hand-Piece for MX System
USF-FTA-12	Feeder Tube Assembly, 0.25-0.74mm wire diameter
USF-FTA-17	Feeder Tube Assembly, 0.75-1.27mm wire diameter
USF-GTA-06	Guide Tube and Teflon Nozzle, 0.6mm
USF-GTA-12	Guide Tube and Teflon Nozzle, 1.2mm
USF-GTA-17	Guide Tube and Teflon Nozzle, 1.7mm
USF-TN06	Teflon Nozzle for USF-GTA-06 (10 Pack)
USF-TN12	Teflon Nozzle for USF-GTA-12 (10 Pack)
USF-TN17	Teflon Nozzle for USF-GTA-17 (10 Pack)
WS1	Work Stand

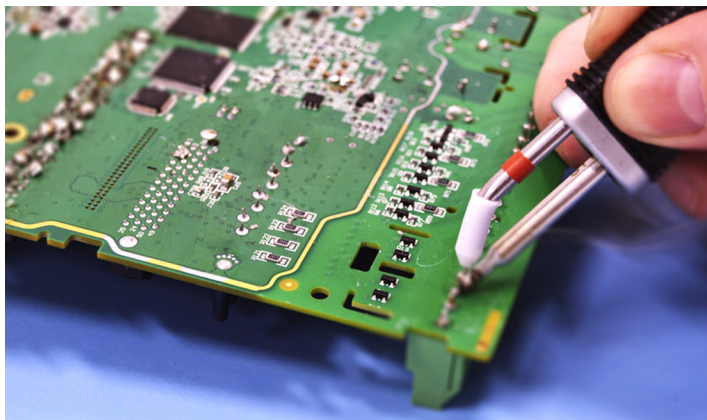

System Configurations & Upgrade Kit

MX-5270 Soldering / Rework System with USF-1000

MX-PS5200 Power Supply, USF-1000 Solder Feeder, MX-H7-SF Solder Feeder Hand-Piece, USF-FTA-12 Feeder Tube Assembly, USF-GTA-12 Teflon Nozzle, Footswitch and WS1 Sleeper Work Stand

MX-570 Soldering / Rework System with USF-1000

MX-500P Power Supply, USF-1000 Solder Feeder, MX-H7-SF Solder Feeder Hand-Piece, USF-FTA-12 Feeder Tube Assembly, USF-GTA-12 Teflon Nozzle, Footswitch and WS1 Sleeper Work Stand

MX-UK7

USF-1000 Solder Feeder, MX-H7-SF Solder Feeder Hand-Piece, USF-FTA-12 Feeder Tube Assembly, USF-GTA-12 Teflon Nozzle, Footswitch and WS1 Sleeper Stand



Specifications

Input Voltage	110 - 230V
Power	18W max.
Dimensions - W x D x H	118 x 246.5 x 125.1mm (4.65" x 9.7" x 4.95")
Weight	1.9kg (4.15 lbs)
Operating Temperature	0 - 50°C (32 - 122°F)
Solder Diameter	0.3 - 1.27mm
Spool Capacity	Up to 1 kg. (2.2 lbs.)
Wire Length	0.2 - 200mm 30.5
Forward Speed	0.5 - 100mm/sec (0.5mm/sec increments)
Reverse Speed	0.5 - 100mm/sec (0.5mm/sec increments)
ESD Safe	10 ⁻⁵ - 10 ⁻⁹ ohm/square per ASTM D257
Program Memory	30 set-ups
Configuration	Standalone